


# SIP Weatherproof Keypad Phone



CyberData's SIP compliant Weatherproof Keypad Phone is a PoE powered IP phone for environmentally demanding installations.

The Type 4X & IP66 sturdy thermoplastic resin enclosure protects the phone against wind blown dust, rain, corrosion, splashing, and high pressure water.

Fully compatible with most on-premise and hosted IP-PBX systems, the CyberData SIP Weatherproof Keypad Phone provides a heavy duty and industrial option for your VoIP project.

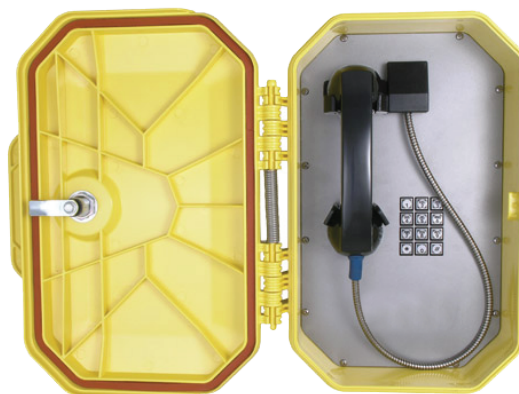

## Features

- PoE 802.3af enabled (Power-over-Ethernet)
- Water/dust-tight thermoplastic resin enclosure, Type 4X & IP66
- Waterproof connections and stainless steel fittings for longer life
- Corrosion protected and powder coated steel faceplate
- Heavy duty G Type industrial handset
- Spring loaded door
- Vandal resistant armored handset cord with lanyard
- Magnetic reed hook switch to reduce parts subject to wear
- Surge arrestor to prevent voltage spike damage
- Easy support drill guides for top and bottom mount glands
- Electronic ringer
- Hearing aid compatible and receiver volume adjustment
- Electret noise reducing microphone for clear communication
- Concurrent SIP call and multicast paging
- Supports SRST (Survivable Remote Site Telephony) in a Cisco environment
- Network web management and firmware download
- Programmable speed dial

Ethernet I/F	10/100 Mbps
Protocol	SIP RFC 3261 Compatible
Power Input	PoE 802.3af compliant or +24 VDC @ 1000mA Regulated Power Supply

On-Board Relay	1A at 30 VDC
----------------	--------------

Environmental	Water/Dust Tight Enclosure: Type 4X and IP66 Temperature: -40° to +140° F (-40° to +60° C) Humidity: 0 - 95% RH Non-Condensing Dust Resistant: Full Gasket Faceplate
---------------	---

Storage Temperature	-40° C to 70° C (-40° F to 158° F)
Storage Altitude	Up to 15,000 ft. (4573 m)

IP Rating	IP66
-----------	------

Payload Types	G711, A-law and $\mu$ -law, G.722
---------------	-----------------------------------

Dimensions*	11.6 inches [296 mm] Length 7.9 inches [200 mm] Width 16.1 inches [409 mm] Height
-------------	---

Weight	11.8 lbs (5.4 kg)
--------	-------------------

Boxed Weight	14.0 lbs (6.3 kg)
--------------	-------------------

Compliance	CE; EMC Directive – Class A EN 55032 & EN 55024, LV Safety Directive – EN 60950-1, RoHS Compliant, FCC; Part 15 Class A, Industry Canada; ICES-3 Class A, IEEE 802.3 Compliant
------------	--

Warranty	2 years limited
----------	-----------------

Part Number	011460
-------------	--------

\*Dimensions are measured from the perspective of the product being upright with the front of the product facing you.